


### TRAK-EZE:

A compact extruded aluminum commercial quality curtain track with cord housed inside the channel. Used as track for medium to large window curtains in auditoriums, media rooms, small stages, home theatre. The track can be surface mounted, suspended (requires optional hardware), or recessed into a ceiling. May be cord operated (up to 30') or manual walk-a-long to almost any length. Two wheel master carriers each run on only one side of track so they can pass each other to create 12" overlap of curtains at center of track. Cannot be curved. The track is 1-1/4" h x 1-7/8" w. Special order item. Track available up to 26' unspliced. Uses #6 (3/16" dia) cord, or #4 (1/8" dia.) wire center cord. Complete track prices include either hanging clamps or factory punched holes on 16" center in top of track (no hanging clamps). Please specify when ordering

#220	Track-eze track with plain polyethylene carriers on 6" centers. ....	\$ 31.76/ft.
#220N	Track-eze track with nylon tired ball bearing carriers on 12" centers. ....	\$ 34.19/ft.
#224	Track-eze track for walk-a-long operation with plain polyethylene carriers on 6" centers. ....	\$ 25.47/ft.
#224N	Track-eze track for walk-a-long operation with nylon tired ball bearing carriers on 12" centers. .	\$ 29.92/ft.
#2200	Extruded aluminum track 16 ga., clear anodized finish. Available in unspliced lengths up to 26'. Size 1-7-8" wide by 1-1/4" high.....	\$ 8.84/ft
#1701	Carrier with polyethylene wheels.....	\$ 4.62
#2201	Carrier with nylon tired ball-bearing wheels ....	\$ 13.98
#2202	Master carrier with 2 polyethylene wheels, cord clamp, and 2 swivels. Approx. 4" wide. ....	\$ 30.44
#2202T	Tandem carrier with 2 polyethylene wheels and 1 swivel rolls in one side of track behind the master carrier to increase overlap of curtain. No cord clamp. Approx. 4" wide .....	\$ 26.33
#2202B	Master carrier with 2 nylon tired ball-bearing wheels, cord clamp, and 2 swivels. Approx. 4" wide. ....	\$ 38.19
#2202BT	Tandem carrier same as 2202T but with nylon tired ball-bearing wheels. ....	\$ 34.89
#2203	Live end pulley. Size 2-5/8" wide and extends 2-3/4" beyond end of track .....	\$ 50.40
#2204	Dead end pulley. Size 2-5/8" wide and extends 2-3/4" beyond end of track .....	\$ 41.58
#2208	Hanging clamp. Space 4' to 5' centers.....	\$ 16.57
#2224	Track splice for alignment of two sections. Slip fit. Not designed to support track or track load. .	\$ 6.29
#2209	Internal stop to prevent carriers from moving past a certain position. Bolt or screw required	\$ .89
#2209W	End stop for walk-a-long manual track. Use one at each end of track.....	\$ 5.35
#2165	Floor/wall tension pulley for cord operated track. Metal construction with nylon ball-bearing pulley. Size 9" high. ....	\$ 16.78
#2202L	Leg master carrier for one-way draw system has 4 nylon tired ball-bearing wheels and cord clamp. has 5.5" extension arm to support leading edge of curtain under the live or dead end pulley at the end of the track. Approx. 10" wide. .	\$ 83.18
#2160	White cord 3/16" dia. (#6) for cord operated track. #1151 wire center cord is preferred as it is stretch resistant. ....	\$ .33/ft
#1151	Wire center white cord 1/8" dia. (#4) for machine operated track.....	\$ 1.24/ft

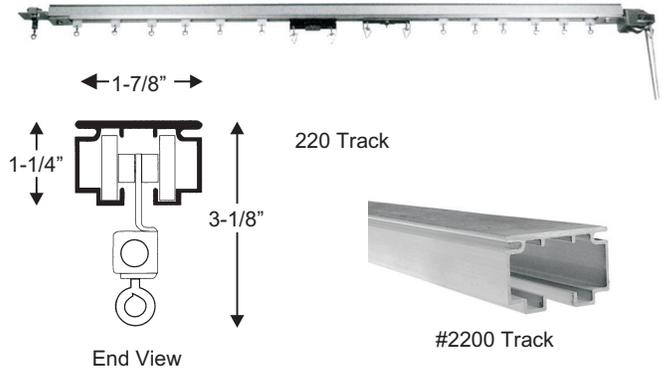

### TRACK INSTALLATION:

Track may be installed directly to a surface using screws, bolts, or anchors (not included) thru holes drilled in the top of the track, or suspended using #2208 hanging clamps (optional), or wall mounted using wall brackets (optional). With carriers on 6" centers, track should be min. 4" to 6" from wall. With carriers on 12" centers, track should be min. 6" to 8" from wall.

[Link to catalog page 14 for details and prices for wall brackets](#)

**NOTE:** Per/foot prices are for estimating only. Additional parts and crating may be required at extra cost.  
For budget purposes, add 50% to prices for tracks of 10' or less.